

## Printing from the APS Wireless Network


Windows XP

10/24/12 mlw

To configure a printer, select: Start->Printers and Faxes




In the Printers and Faxes pop-up window, select: Add a Printer

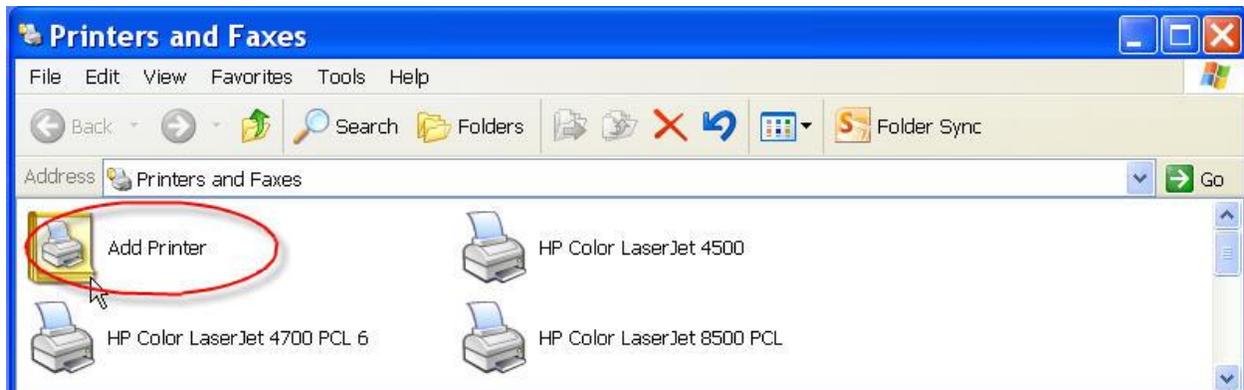


In the Add Printer Wizard screen, click on Next.



In the next screen, select: Add a local printer (requires administrator rights) and click on Next.

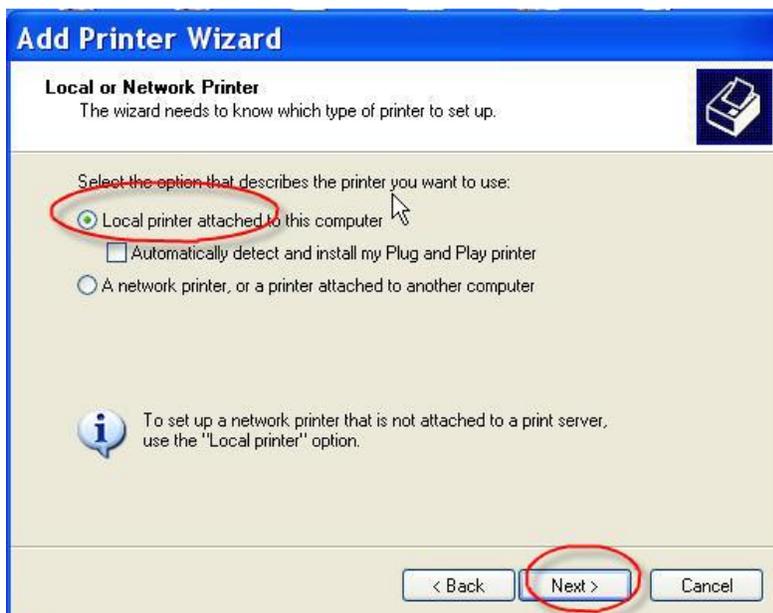


In the next Add Printer Wizard screen, select: Create a new port, choose: Standard TCP/IP Port from the pull-down menu and click on Next.

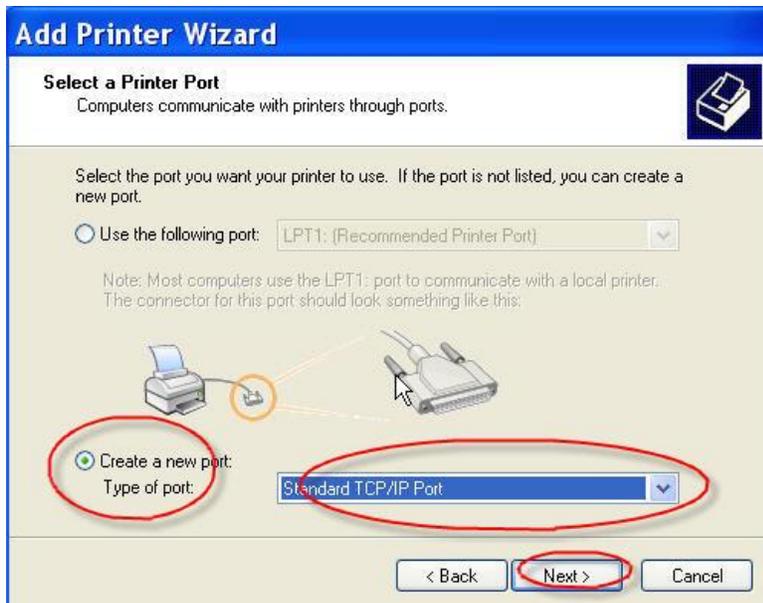


On the next Add Standard TCP/IP Printer Port Wizard screen, click on Next.



Each printer at the APS is labeled as [\\print-server-name\printer-name](#). In the next Add Printer screen, enter the printer-name, as the fully-qualified DNS name, printer-name.aps.anl.gov (if in the APS domain) or printer-name.xray.aps.anl.gov (if in the XRAY domain). The port name will automatically be populated. Click on Next.

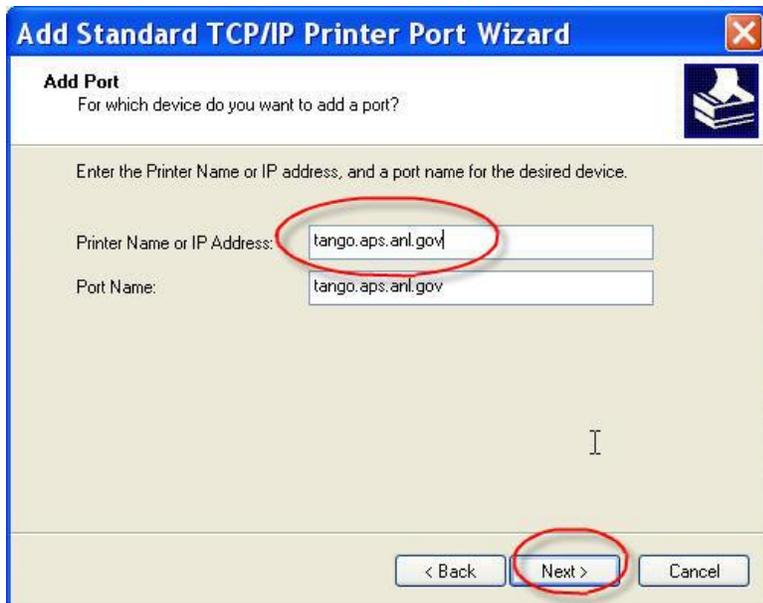

In next Add Standard TCP/IP Printer Port Wizard screen, select Standard and from the pull-down menu, select Hewlett Packard Jet Direct and click on Next. Most printers at the APS are HP printers.

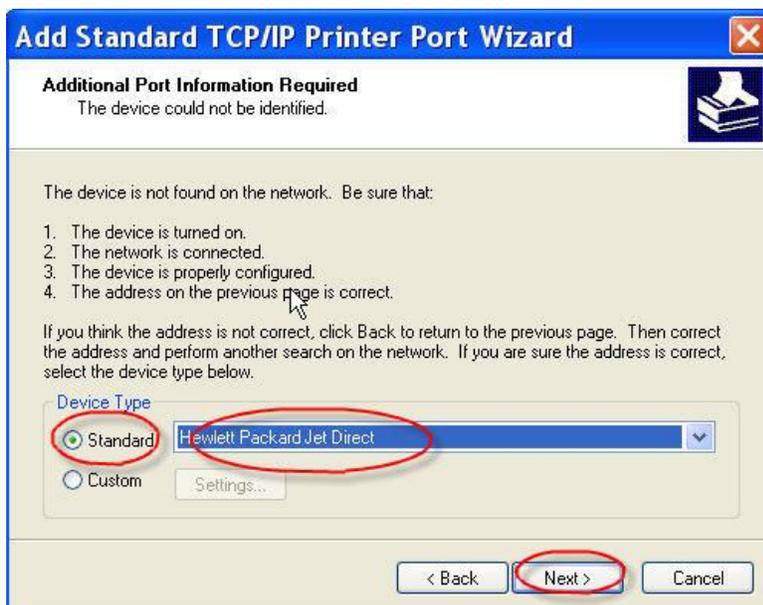


X




On the install printer driver screen, select “Windows Update” and click on Next.




Select Manufacturer “HP” and select the correct printer model in the printers column.

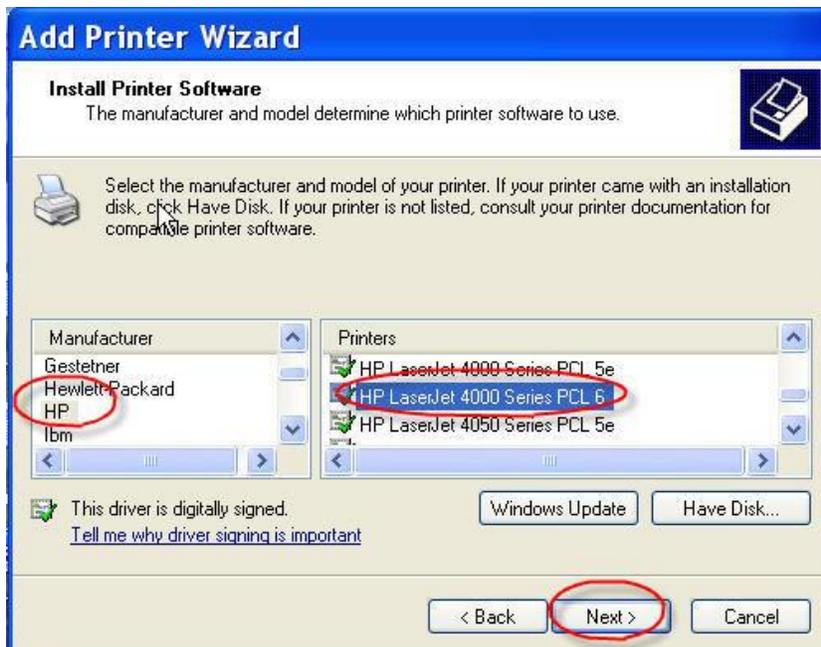


In the next Add Printer screen, enter your preferred printer name. choose to make it the default printer, and click on Next.

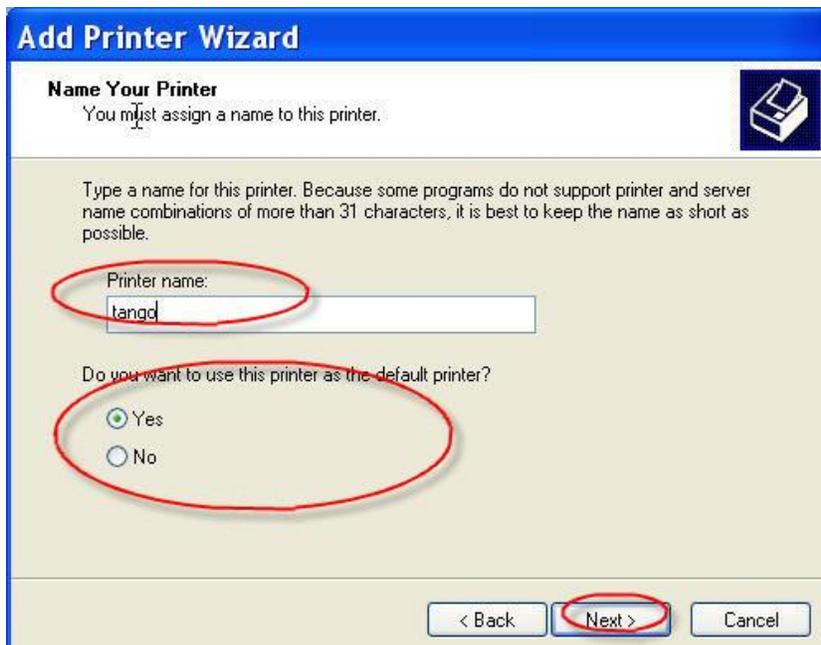

Select "Do not share this printer" on the Printer Sharing screen and select Next.

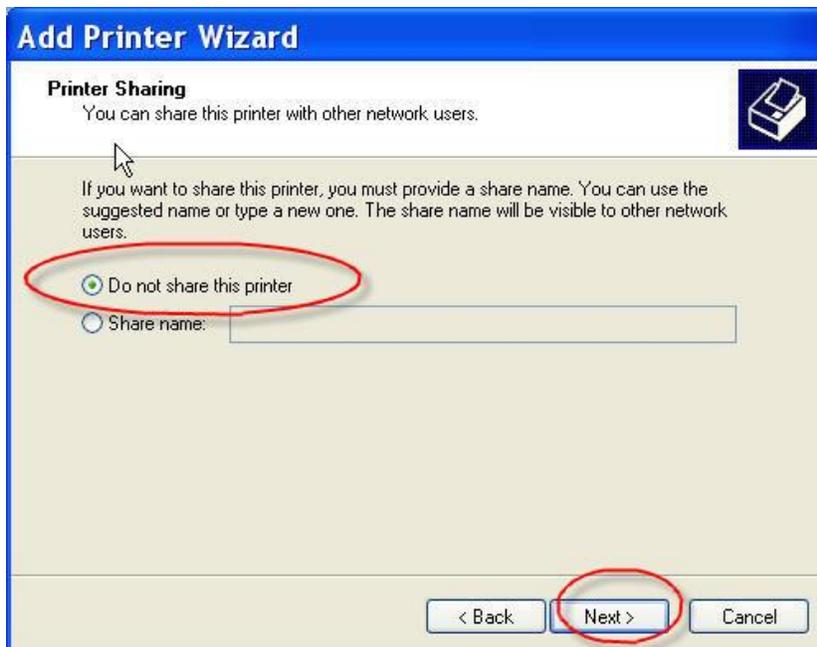

Choose to print a test page or not and click on Next.

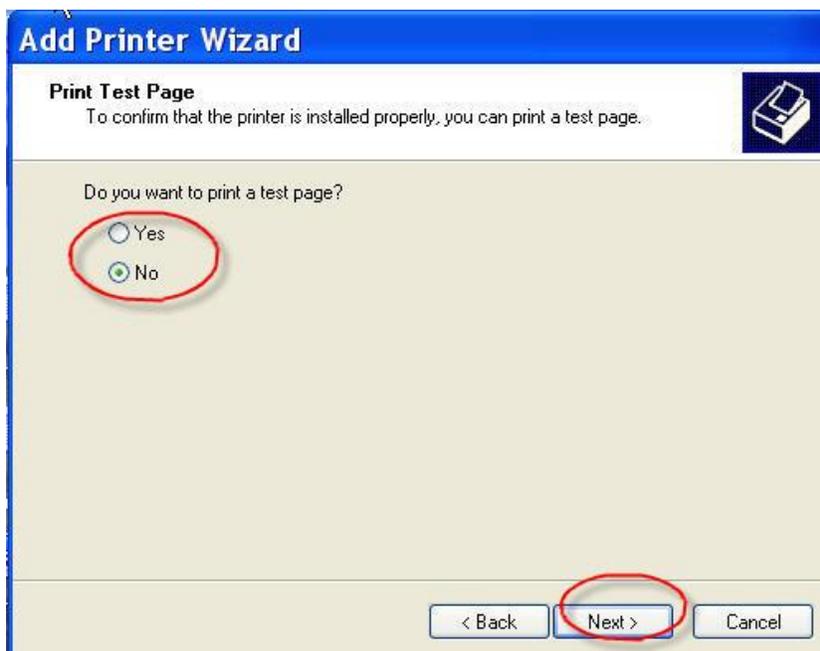

On the next screen, click on Finish.



Notice the printer now appears in your list of available printers.

