Enclosure, EN-10103, Digital ASC for AHU-201

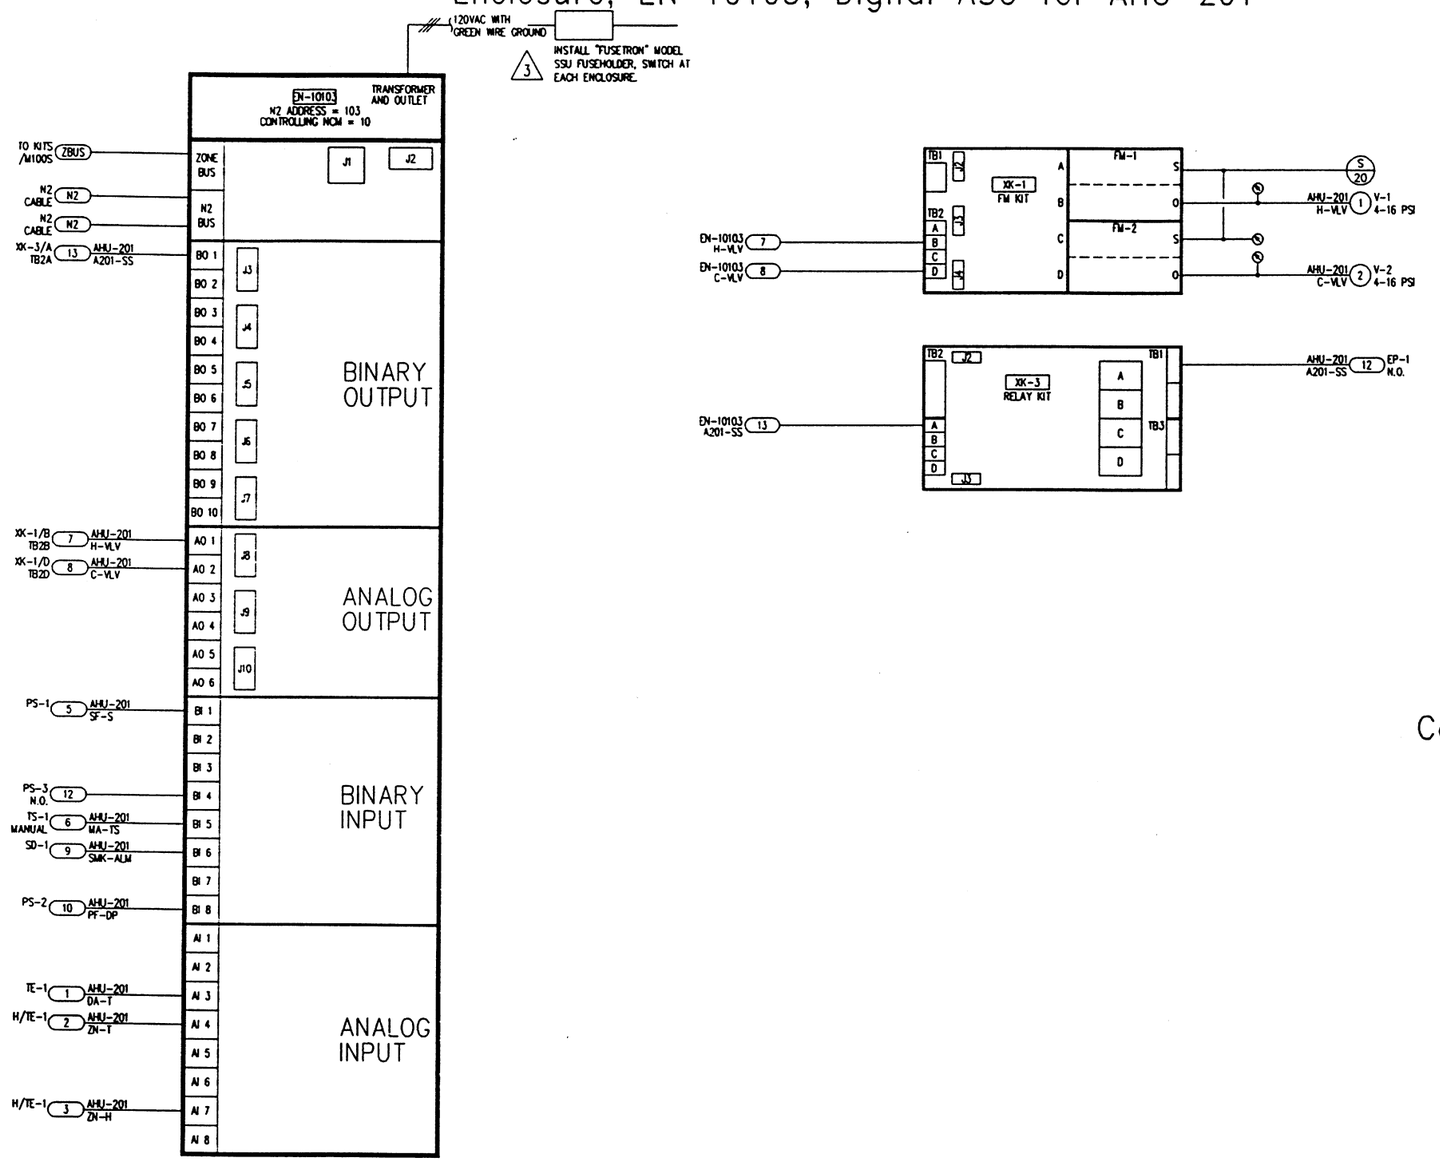

PANEL MATERIAL

	DEVICE TAG	QTY	CODE NUMBER	DESCRIPTION
(P)	EN-10103	1	AS-AHU101-0	AIR HANDLING UNIT ENC/TER
		1	AS-AHU102-0	AIR HANDLING UNIT LOGIC B
		1	AS-XFR100-0	100VA TRANSFORMER KIT
		1	EN-EWC200-0	ENCLOSURE
(P)	FM-1-FM-2	2	FM-OAP102-0	OAP MANUAL MODULE
		2	FM-OAP103-0	E/P OUT FM FOR ASC
(P)	XK-1	1	AS-FMK100-0	FUNCTION MOD KIT-4 SLOTS
(P)	XK-3	1	AS-RLY100-0	LINE VOLTAGE RELAY KIT
(P)	ACC	3	G-2010-5	0-30 PSI, 1 1/2 IN PRESS GAUGE

NOTES:

1. ALL MATERIAL WITH (P) PRECEEDING THE DEVICE TAG IN THE BILL OF MATERIAL IS PROPRIETARY AND IS BEING SUPPLIED BY JOHNSON CONTROLS, INC. ALL OTHER MATERIAL IS NON-PROPRIETARY.

Control System Object Definition

103 NC10_HV\AHU201	AHU	AHU		
		1	AHU-201\SF_S	BI
		4		BI
		5	AHU-201\MA_TS	BI
		6	AHU-201\SF_SD	BI
		8	AHU-201\FILTER	BI
		197	AHU-201\FAN-C	BO
		3	AHU-201\DA_T	AI
		4	AHU-201\ZN_T	AI
		7	AHU-201\ZN_H	AI
		1	AHU-201\DA_T	AI
		0	AHU-201\AHU_201	CS/ASC

FILE: EN-10103

REFERENCE DRAWING	NO.	REVISION-LOCATION	ECN	DATE	BY
	4	ADD PUMP STATUS		03/08/94	SF
	3	ADD DISCONNECT		07/15/92	SF
	2	GENERAL		04/29/92	SF

SALES ENGR	PROJECT MGR	APPL. ENGR	DRAWN	APPROVED
JP	SF	DCS	BY SF DATE 12/02/91	BY DATE

DRAWING TITLE
Enclosure, EN-10103
Digital ASC, AHU100 Serving
Air Handling Unit, AHU-201
Linac Injection

PROJECT
The Argonne National Labs
Advanced Photon Source Campus
9700 Cass Avenue South
Argonne, IL 60439

JOHNSON CONTROLS
Systems & Services Division

3007 MALMO ROAD
ARLINGTON HEIGHTS
ILLINOIS 60005
708/364-1500 Main
708/806-4438 Eng

CONTRACT NUMBER 91390-0009

DRAWING NUMBER 91-9-B-05B

COPYRIGHT JOHNSON CONTROLS, INC. 1993